

HEAVY DUTY COMMERCIAL LEVERS

Specifications

Door Preparation: Cross bore 2 1/8-in with 2X 5/16-in thru-bolt, edge bore 1-in, 1-in x 2 1/4-in latch mortise

Backset: Fixed 2-3/4-in

Door Thickness: 1 3/8-in to 2-in

Cylinder: SC4, 6 pin

Chassis: Cylindrical

Faceplate: 2-1/4-in square corner

Strikes: T-strike (1-1/8-in x 2-3/4-in) and ASA strike (1-1/4-in x 4-7/8-in)

Bolt: 1/2-in Throw

UL: 3 HR fire rated

ADA: Yes

Door Handing: All hardware is reversible for left or right handed doors.

ANSI Grading: Meets Grade 2 standards

Rosette Diameter: 3- 5/16-in



3 HR. FIRE RATED




ADA COMPLIANT




ANSI GRADE 2


Functions




ANSI F109 Keyed Entry



ANSI F76 Privacy




ANSI F75 Passage



ANSI F86 Storeroom

Dimensions

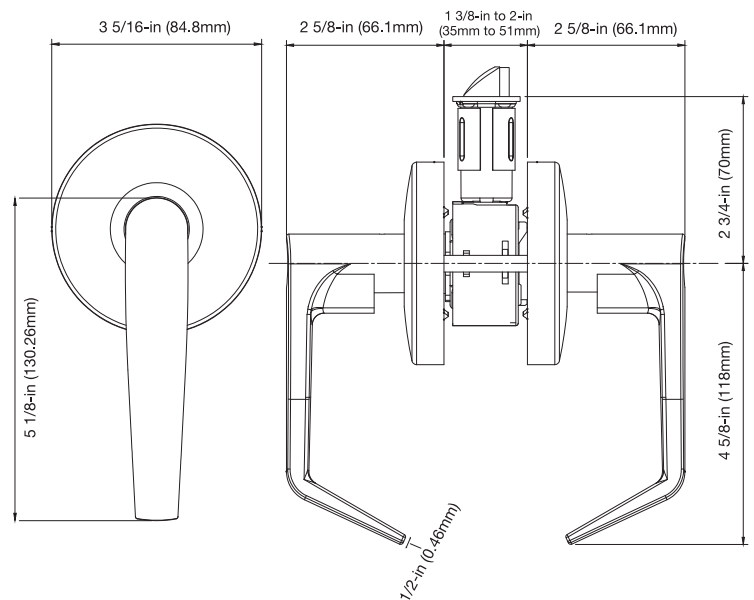

Finishes



Satin Chrome



Matte Black