

LIGHT DUTY COMMERCIAL LEVERS

Specifications

Door Preparation: Cross bore 2 1/8-in edge bore 1-in,
1-in x 2 1/4-in latch mortise

Backset: 2 3/8-in or 2 3/4-in

Door Thickness: 1 3/8-in to 2-in

Cylinder: SC1, 5 pin

Chassis: Tubular

Faceplate: 2-1/4-in square corner

Strikes: Full lip strike and T-strike

Bolt: 1/2-in Throw

UL: 3 HR fire rated

ADA: Yes

Door Handing: All hardware is reversible for left or right handed doors.

ANSI Grading: Meets Grade 2 standards

Rosette Diameter: 2-5/8-in



3 HR. FIRE RATED




ADA COMPLIANT




ANSI GRADE 2


Functions




UH40049
F82B (Panic Release)
Keyed Entry



UH40048
F76A (Panic Release)
Privacy




UH40047
ANSI F75 Passage



UH40050
ANSI F86 Storeroom

Dimensions

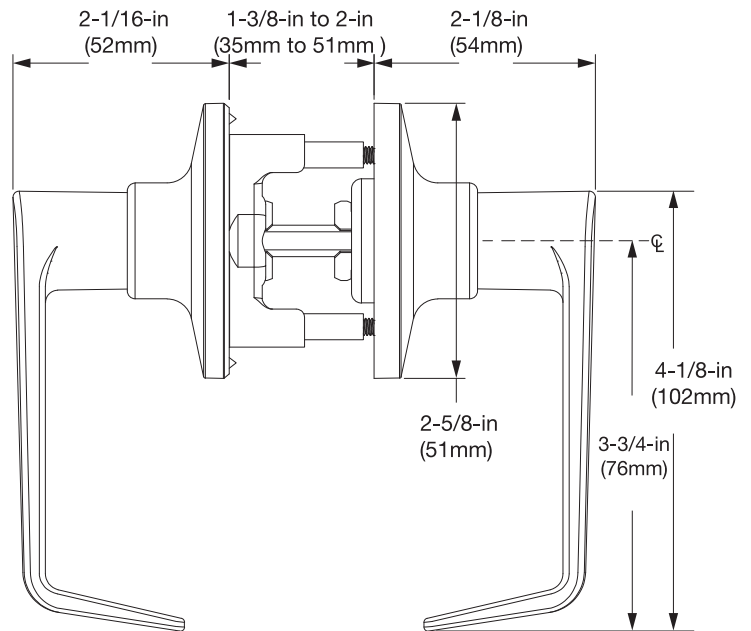

Finishes



Satin Chrome



Matte Black