

LIGHT DUTY COMMERCIAL KNOBS

Specifications

Door Preparation:	Cross bore 2 1/8-in edge bore 1-in, 1-in x 2 1/4-in latch mortise
Backset:	2 3/8-in or 2 3/4-in
Door Thickness:	1 3/8-in to 2-in
Cylinder:	SC1, 5 pin
Chassis:	Tubular
Faceplate:	2-1/4-in square corner
Strikes:	Full lip strike and T-strike
Bolt:	1/2-in Throw
UL:	3 HR fire rated
Door Handing:	All hardware is reversible for left or right handed doors.
ANSI Grading:	Meets Grade 2 standards
Rosette Diameter:	2-5/8-in




3 HR. FIRE RATED



ANSI GRADE 2

Dimensions

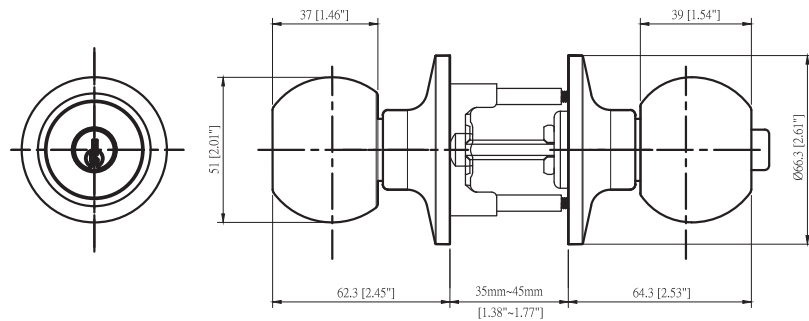

Functions



UH40052

**F82B (Panic Release)
Keyed Entry**



UH40057

**F76A (Panic Release)
Privacy**



UH40051

ANSI F75 Passage



UH40053

ANSI F86 Storeroom

Finishes



Satin Chrome



Matte Black