

LIGHT DUTY COMMERCIAL KNOB AND DEADBOLT COMBO

Specifications

Door Preparation:	Cross bore 2 1/8-in edge bore 1-in, 1-in x 2 1/4-in latch mortise
Adjustable Backset:	2 3/8-in or 2 3/4-in
Door Thickness:	1 3/8-in to 2-in
Cylinder:	Knob: SC1, 5-pin Deadbolt: SC1, 5-pin
Chassis:	Tubular (Knob)
Faceplate:	Knob: 2-1/4-in square corner Deadbolt: 2-1/4-in square corner
Strikes:	Knob: Full lip strike and T-strike Deadbolt: square corner strike and reinforcement plate
Bolt:	Knob: 1/2-in Throw Deadbolt: 1-in Throw
UL:	3 hr fire rated
Door Handing:	All hardware is reversible for left or right handed doors.
ANSI Grading:	Meets Grade 2 standards
Rosette Diameter:	Knob: 2-5/8-in Deadbolt: 2-1/2-in
Deadbolt Thumbturn:	2-in



3 HR. FIRE RATED



ANSI GRADE 2


Functions



UH40054/UH40106

ANSI F82B (Panic Release) Entry Knob

Dimensions

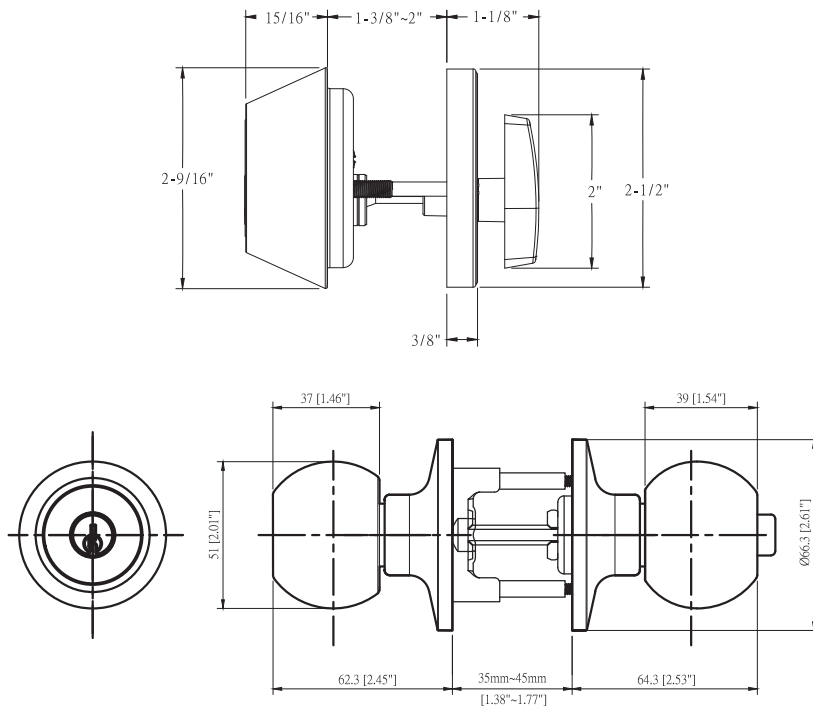

Finishes



Satin Chrome



Matte Black