

INDUSTRIAL DUTY DEADBOLTS

Specifications

Door Preparation:	Cross bore 2-1/8-in edge bore 1-in, 1-1/8-in x 2-1/4-in latch mortise
Adjustable Backset:	2-3/8-in or 2-3/4-in
Door Thickness:	Single 1-3/8-in to 2-in Double 1-9/16-in to 2-in
Cylinder:	SC4, 6-pin
ADA Compliant:	Yes
Faceplate:	Square corner, 2-1/4-in H x 1-1/8-in W
Strikes:	Square corner deadbolt strike and reinforcement plate
Bolt:	1-in Throw
UL:	3 hr fire rated
Door Handing:	All hardware is reversible for left or right handed doors.
ANSI Grading:	Meets Grade 1 standards
Rosette Diameter:	2-1/2-in
Thumbturn:	2-in length



3 HR. FIRE RATED



ANSI GRADE 1



ADA COMPLIANT
SINGLE CYLINDER ONLY

Finishes

Satin Chrome





Matte Black



Single Cylinder Deadbolt UH40055/UH40130

Dimensions

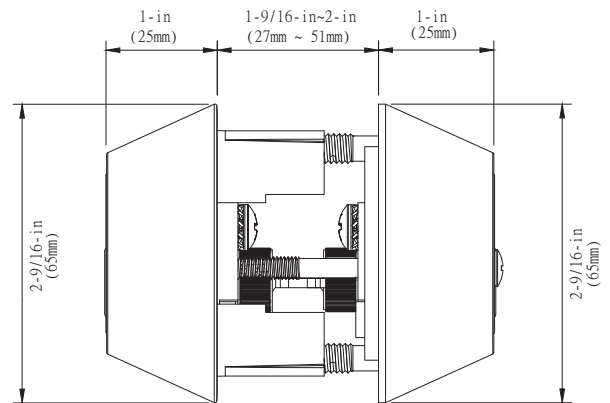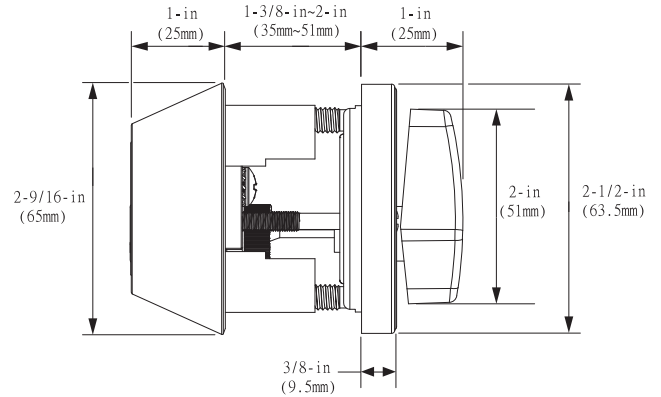

Satin Chrome



Double Cylinder Deadbolt UH40056