

HEAVY DUTY COMMERCIAL LEVER AND DEADBOLT COMBO

Specifications

Door Preparation:	Cross bore 2-1/8-in with (2) 5/16 thru-bolt holes, 1-in edge bore, 2-1/4-in T x 1-1/8-in W latch mortise
Backset:	Deadbolt: Adjustable 2-3/8-in or 2-3/4-in Lockset: Fixed 2-3/4-in
Door Thickness:	1-3/8-in to 2-in
Cylinder:	SC4, 6 pin
Lever Chassis:	Cylindrical
Faceplate:	Deadbolt: Square Corner, 2-1/4-in T x 1-1/8-in W Lockset: Square Corner, 2-1/4-in T x 1-1/8-in W
Strikes:	Deadbolt: Square corner strike plate and reinforcement plate (1-1/8-in x 2-3/4-in) Lockset: T-strike (1-1/8-in x 1-3/4-in) and ASA strike (1-7/8-in x 4-7/8-in)
Bolt:	1-in Throw
UL:	3 hr fire rated (Deadbolt and Lockset)
ADA:	Yes (Deadbolt and Lockset)
Door Handing:	All hardware is reversible for left or right handed doors.
ANSI Grading:	Deadbolt: Meets Grade 1 Standards Lockset: Meets Grade 2 Standards
Rosette Diameter:	Deadbolt: 2-9/16-in Lockset: 3-5/16-in
Lever Length:	4-5/8-in
Deadbolt Thumbturn Length:	2-in



3 HR. FIRE RATED



ADA COMPLIANT





ANSI GRADE 2
LOCKSET



ANSI GRADE 1
DEADBOLT

Dimensions

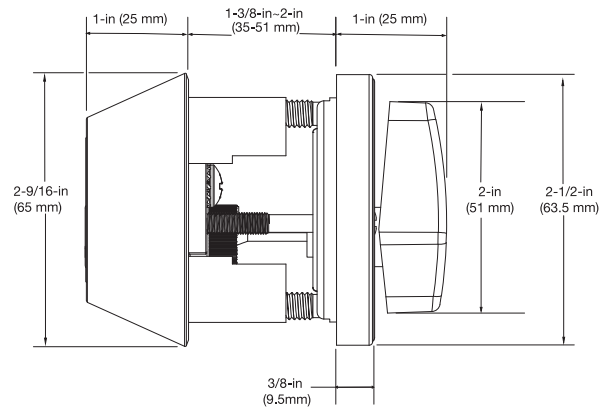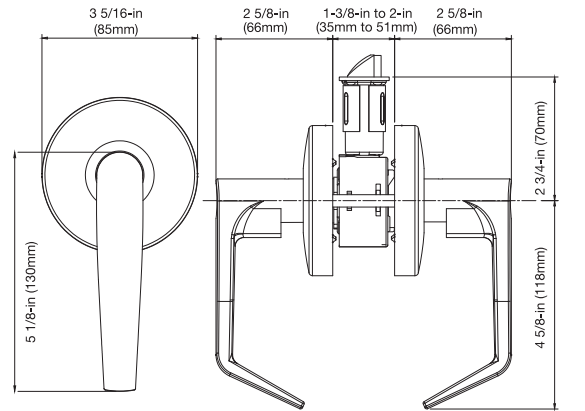

Components



Finishes



Satin Chrome